


# DC-BLK-1G-...

## DC-block

### DESCRIPTION

- DC-blocking of both conductor and ground.
- For galvanic separation of electrical equipment.
- No DC-current-loop possible.
- Large frequency range.
- Available with different connectors.
- Fits directly into the coaxial line.

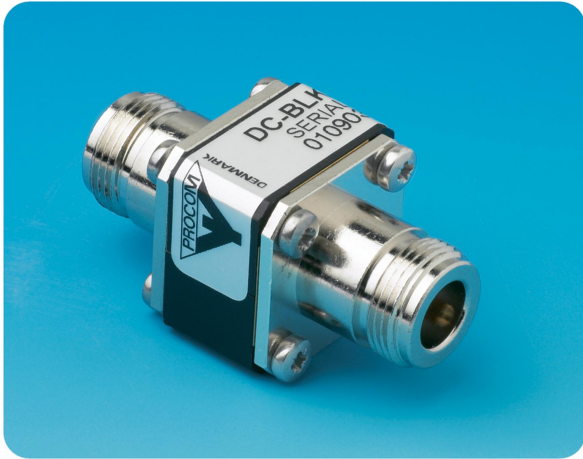

### ORDERING DESIGNATIONS

TYPE	CONNECTOR TYPE
DC-BLK-1G-N	2 x N-female
DC-BLK-1G-UHF	2 x UHF-female
DC-BLK-1G-BNC	2 x BNC-female
DC-BLK-1G-TNC	2 x TNC-female
DC-BLK-1G-FME	2 x FME-female
DC-BLK-1G-SMA	2 x SMA-female

### SPECIFICATIONS

ELECTRICAL	
MODEL	DC-BLK-1G-...
TYPE	DC-block
FREQUENCY RANGE	50 - 1300 MHz
INSERTION LOSS	<0.5 dB
SWR	< 1.5
MAX. VOLTAGE	400 V DC
POWER HANDLING	Max. 100 W
MECHANICAL	
CONNECTORS	See model selection table
SIZE (L x W x H)	50 x 25 x 25 mm



PROCOM France S.A.R.L. se réserve le droit  
d'améliorer les spécifications sans préavis.  
25/01/13