

EFD 1800/DECT-SMA

End-Fed $\frac{1}{2} \lambda$ Dipole Antenna with SMA-Connector for Portable Equipment in the DECT Band

DESCRIPTION

- End-fed $\frac{1}{2} \lambda$ whip in the DECT band - groundplane independent.
- High gain and efficient decoupling from the portable equipment due to half-wave design.
- 5 dB gain compared to a $\frac{1}{4} \lambda$ antenna whip on the same equipment.
- Highest quality materials in a long-lasting and durable design.
- Provided with SMA (male) connector.




ORDERING DESIGNATIONS

TYPE	PRODUCT NO.
EFD 1800/DECT-SMA	140000154

SPECIFICATIONS

ELECTRICAL	
MODEL	EFD 1800/DECT-SMA
ANTENNA TYPE	End-fed $\frac{1}{2} \lambda$ antenna for portable equipment
FREQUENCY	1880 - 1900 MHz (DECT)
IMPEDANCE	Nom. 50 Ω
POLARIZATION	Vertical
GAIN	5 dB (compared to a $\frac{1}{4} \lambda$ portable antenna on the same equipment)
BANDWIDTH	≥ 50 MHz @ SWR ≤ 1.5
SWR	< 1.3 @ f. res.
MAX. POWER	25 W
MECHANICAL	
MATERIALS	Black cover POM Black-chromed brass
COLOUR	Black
TOTAL HEIGHT	Approx. 135 mm
WEIGHT	Approx. 25 g
CONNECTOR	SMA (male)

TYPICAL SWR CURVE

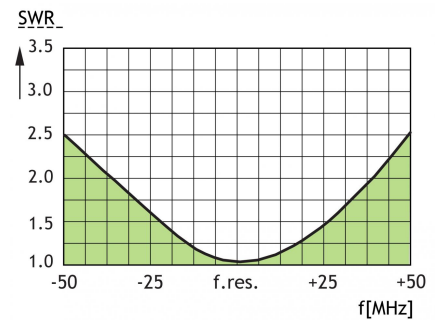



PROCOM France S.A.R.L. se réserve le droit
d'améliorer les spécifications sans préavis.

07/12/11