

SB 2/...-IC-F51

Steel-Band Antenna for ICOM Portable Equipment in the 2 m Band

DESCRIPTION

- Rugged, flexible steel-band antenna whip.
- Curved sectional area to help keeping the antenna erect.
- Full-size $\frac{1}{4} \lambda$ whip.
- Provided with toggle joint and wing screw for easy fold-down.
- Delivered factory tuned and tested to ensure minimum SWR and optimum performance.
- Especially designed for ICOM IC-F51 (150 MHz band).




ORDERING DESIGNATIONS

TYPE	PRODUCT NO.	FREQUENCY
SB 2/l-IC-F51	140000146	144 - 164 MHz
SB 2/h-IC-F51	140000147	155 - 175 MHz

SPECIFICATIONS

ELECTRICAL	
MODEL	SB 2/...-IC-F51
ANTENNA TYPE	$\frac{1}{4} \lambda$ antenna for portable equipment
FREQUENCY	2 m band covered by two models
IMPEDANCE	Nom. 50 Ω
POLARIZATION	Vertical
GAIN	0 dB (equal to a $\frac{1}{4} \lambda$ portable antenna)
BANDWIDTH	≥ 20 MHz @ SWR ≤ 2.5
SWR	< 2 when mounted directly on portable equipment
MAX. POWER	200 W
MECHANICAL	
MATERIALS	Stainless steel band and rubber Weather- and shockproof plastics Black-chromed brass
COLOUR	Black
TOTAL HEIGHT	500 mm (dep. on type)
WEIGHT	Approx. 45 g
CONNECTOR	SMA (male) special for IC-F51

TYPICAL SWR CURVE

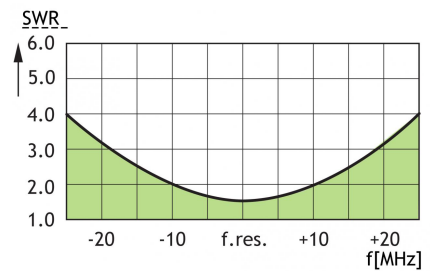

PROCOM France S.A.R.L. se réserve le droit d'améliorer les spécifications sans préavis.
05/12/11