


MCA 4-Z

¼ λ Glass fiber Motor Cycle Antenna with Shock Spring for the 80 MHz Band

DESCRIPTION

- MCA 4-Z is a glass fiber ground-plane antenna type with 2 radials, ideal for a motor cycle.
- Sturdy, general-purpose ¼ λ ground-plane antenna in professional quality.
- Stainless steel Z-mount with ball-joint and hat screw whip-fastening system.
- Simple mounting by the Z-mount with FME-connection (supplied without cable).

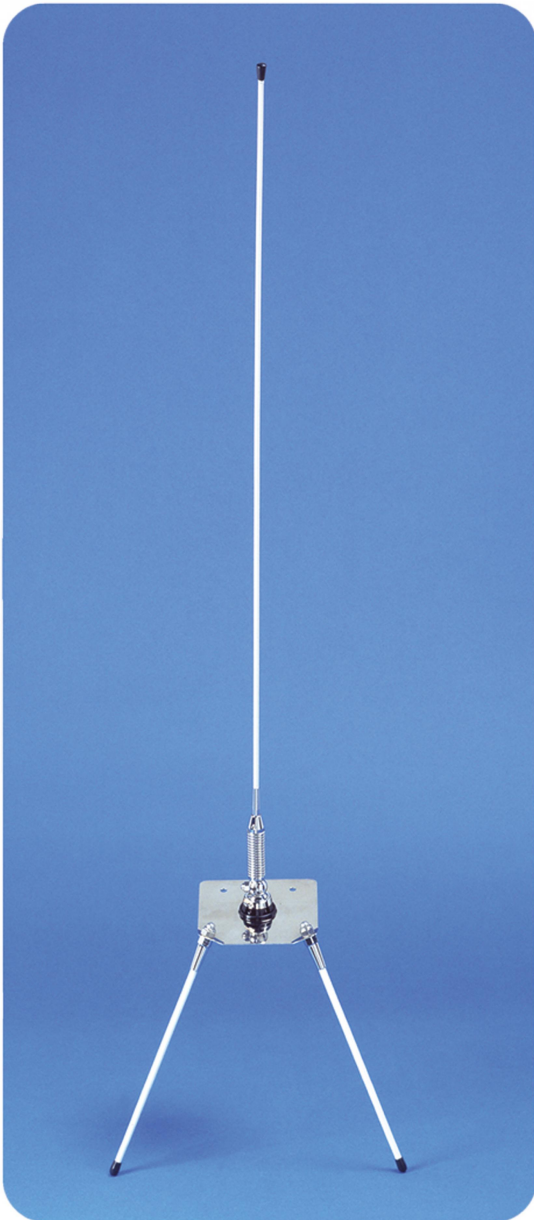

ORDERING DESIGNATIONS

TYPE	PRODUCT NO.
MCA 4-Z	130000676

When ordering, please state the required frequency.

SPECIFICATIONS

ELECTRICAL	
MODEL	MCA 4-Z
ANTENNA TYPE	¼ λ ground-plane
FREQUENCY	Tunable by cutting within: 66-88 MHz Done by Procom
IMPEDANCE	Nom. 50 Ω
POLARIZATION	Vertical
GAIN	0 dB (acc. to EIA RS-329-1)
BANDWIDTH	≥ 4 MHz @ SWR ≤ 2.0
SWR	≤ 1.3 @ f.res.
MAX. POWER	150 W
MECHANICAL	
MATERIALS	Whip: Conical glass fiber Chromed brass Spring: Stainless steel Mount: Chromed brass Weather- and shockproof plastics Stainless steel
COLOUR	White/bright chrome
HEIGHT	Approx. 1200 mm
WEIGHT	Approx. 500 g
MOUNTING	On the rear side of a motor cycle

FME-SYSTEM ACCESSORIES

FME-CABLES		FME-CONNECTORS	
TYPE	LENGTH	TYPE	CONNECTOR
1 m FME	1 m	FME-FME	FME-FME
2 m FME	2 m	FMEP	Prolongation
3 m FME	3 m	FME-N	N
4 m FME	4 m	FME-FSMA	FSMA
5 m FME	5 m	FME-BNC	BNC
6 m FME	6 m	FME-TNC	TNC
4 m FME-white	4 m white	FME-UHF	UHF
6 m FME-white	6 m white	FME-MUHF	Mini-UHF
12 m FME-white	12 m white	FME-EMUHF	Elbow-MUHF
18 m FME-white	18 m white	FME-EBNC	Elbow-BNC
		FME-ETNC	Elbow-TNC
		FME-SMA	SMA

For further information about other types of FME-cables and FME-connectors, please compare the cable and connector data sheets under accessories in our catalogue.



PROCOM France S.A.R.L. se réserve le droit d'améliorer les spécifications sans préavis.

06/04/11